


COM-HPC[®]

Client Carrier

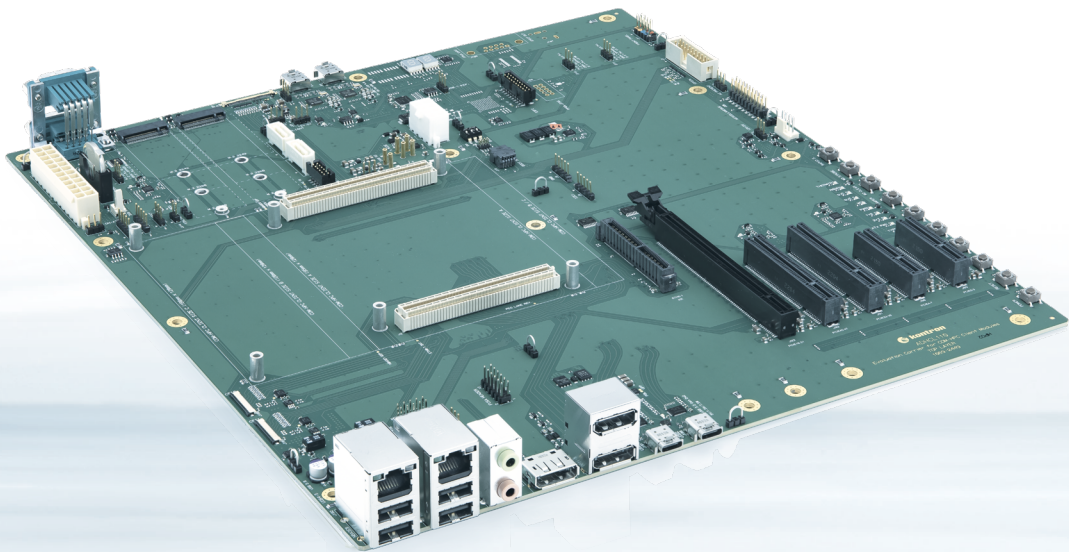

COM-HPC[®] Client Carrier

- ▶ Support of 48 PCIe lanes via various PCIe and m.2 slots
- ▶ 2x 10/1GBase-T interface
- ▶ 2x USB Gen 4 + 2x USB 3.2 Gen 2x1, 2x SATA
- ▶ 3x DisplayPort, 1x eDP, 2x MIPI-CSI
- ▶ BIOS POST-Code display

POSSIBILITIES START HERE

▶ TECHNICAL INFORMATION

COMPLIANCE	COM-HPC Client Carrier - Size A, B and C
DIMENSIONS	305 mm x 330 mm (E-ATX)
ETHERNET	2x RJ45 – max. 10G-BASE-T 2x KR Extension for 100G LAN
DISPLAY/CAMERA	3x DisplayPort 1x eDP 2x MIPI-CSI
PCI Express®	1x PCIe Gen5 x16 slot (PCIe Lane Group 1) 2x PCIe Gen4 x8 to 4x PCIe card slots (PCIe Lane Group 2) 2x PCIe Gen4 x4 to 2x PCIe card slots (PCIe Lane Group 0 Low) 2x PCIe Gen3 x4 to 2x m.2 2242/2280 slots (PCIe Lane Group 0 High)
USB	2x USB Gen 4 + 2x USB 3.2 Gen 2x1 4x USB 2.0
SERIAL	2x DSUB9 - COM ports (RX/TX)
VISUAL CONTROL	BIOS POST-CODE: 4x 7 segment display Various LEDs
ONBOARD HEADER	2x SATA 3x I ² C 1x eSPI 1x GP_SPI 1x SMBus 1x GPIO 1x FAN 1x Feature Connector
VARIOUS	BIOS flash-socket Battery holder
POWER SUPPLY	ATX power supply 24 + 8 pin

▶ GLOBAL HEADQUARTERS

Kontron Europe GmbH

Gutenbergstraße 2
85737 Ismaning, Germany
Tel.: +49 821 4086-0
Fax: +49 821 4086-111
info@kontron.com

www.kontron.com